


# HMSBC



## Operating Limits

- Balanced seal
- Pressure : Up to 30kg/cm<sup>2</sup>
- Temperature : -30°C~250°C
- Velocity : 15m/sec
- Viscosity : 300,000CP
- Slurry : Up to 7%

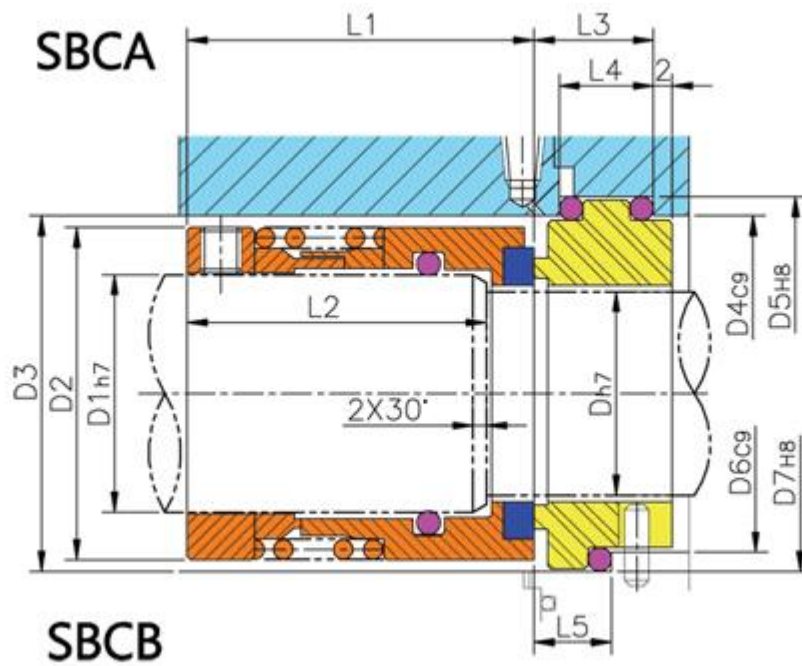

## SBC Fitting Dimension (mm)

MODEL							ISO				DIN		
	D	D1	D2	D3	L1	L2	D4	D5	L3	L4	D6	D7	L5
SBC-20	20	24	38	40	49	42	40	46	23	18	29	35	9.5

SBC-22	22	26	40	42	49	42	42	48	23	18	31	37	9.5
SBC-24	24	28	42	44	51	44	44	50	23	18	33	39	9.5
SBC-25	25	30	44	46	51	44	46	52	23	18	34	40	9.5
SBC-28	28	33	47	49	51	44	49	55	23	18	37	43	9.5
SBC-30	30	35	49	51	55	48	51	57	23	18	39	45	9.5
SBC-33	33	38	54	58	58	51	58	64	25	20	42	48	9.5
SBC-35	35	40	56	60	60	53	60	66	25	20	44	50	9.5
SBC-38	38	43	59	63	61	53	63	69	25	20	49	56	10
SBC-40	40	45	61	65	61	53	65	71	25	20	51	58	10
SBC-43	43	48	64	68	61	53	68	74	25	20	54	61	13.5
SBC-45	45	50	66	70	65	57	70	76	25	20	56	63	13.5
SBC-48	48	53	69	73	65	57	73	79	25	20	59	66	13.5
SBC-50	50	55	71	75	65	57	75	81	25	20	62	70	14
SBC-53	53	58	76	83	68	59	83	89	28	22	65	73	14
SBC-55	55	60	78	85	68	59	85	91	28	22	67	75	14
SBC-58	58	63	81	88	68	59	88	94	28	22	70	78	14
SBC-60	60	65	84	90	72	63	90	96	28	22	72	80	14
SBC-63	63	68	87	93	72	63	93	99	30	24	75	83	14
SBC-65	65	70	90	95	73	64	95	101	30	24	77	85	14
SBC-70	70	75	95	104	75	66	104	110	30	24	83	92	17.3
SBC-75	75	80	100	109	75	66	109	115	31	25	88	97	17.3
SBC-80	80	85	107	114	81	72	114	120	31	25	95	105	17.5
SBC-85	85	90	112	119	82	72	119	125	31	25	100	110	17.5
SBC-90	90	95	119	124	87	77	124	130	31	25	105	115	17.5
SBC-95	95	100	124	129	87	77	129	135	31	25	110	120	17.5
SBC-100	100	105	129	134	87	77	134	140	31	25	115	125	17.5