


## HM156

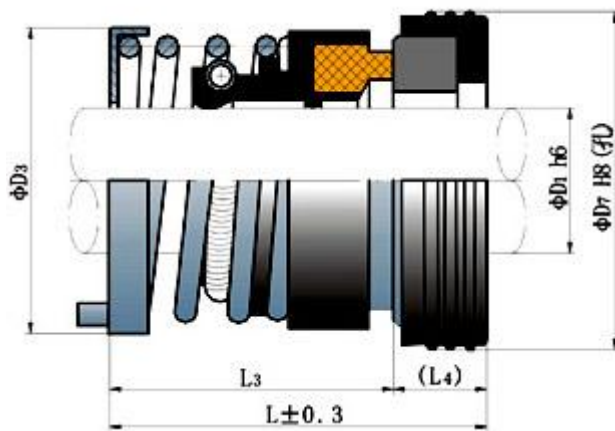

### Applications

- ▶ Temperature:  $-20 \sim +100^{\circ}\text{C}$
- ▶ Pressure:  $\leq 0.5\text{MPa}$
- ▶ Speeds:  $\leq 5\text{m/second}$
- ▶ Medium: User in clean water pumps, circulation pumps and general industrial pumps.

型号MODEL	D1	D3	D7	L	L3	L4
HM156-8	8	17.0	18	18.0	13.5	4.5
HM156-8A	8	17.0	21	18.0	13.5	4.5
HM156-9	9	18.5	21	22.0	16.0	6.0
HM156-10	10	21.0	22	23.0	17.0	6.0
HM156-11	11	21.0	24	23.0	16.5	6.5
HM156-12	12	23.0	26	24.0	17.5	6.5
HM156-13	13	23.5	26	24.0	17.5	6.5
HM156-14	14	25.0	28	25.0	18.5	6.5
HM156-15	15	25.0	28	25.0	18.5	6.5
HM156-16	16	28.5	32	27.0	19.0	8.0
HM156-17	17	28.5	32	27.0	19.0	8.0
HM156-18	18	31.5	35	29.0	21.0	8.0
HM156-19	19	31.5	35	29.0	21.0	8.0
HM156-20	20	33.5	38	31.0	23.0	8.0
HM156-22	22	34.5	40	32.0	24.0	8.0
HM156-25	25	37.5	44	33.0	24.0	9.0
HM156-28	28	40.5	46	34.0	25.0	9.0
HM156-30	30	47.5	50	35.0	25.5	9.5
HM156-32	32	47.5	54	37.0	27.5	9.5
HM156-35	35	50.5	58	40.0	30.0	10.0
HM156-38	38	53.5	60	42.0	32.0	10.0
HM156-40	40	56.5	64	43.0	33.0	10.0
HM156-45	45	61.5	66	45.0	35.0	10.0
HM156-50	50	66.5	72	47.0	37.0	10.0