



HM KB

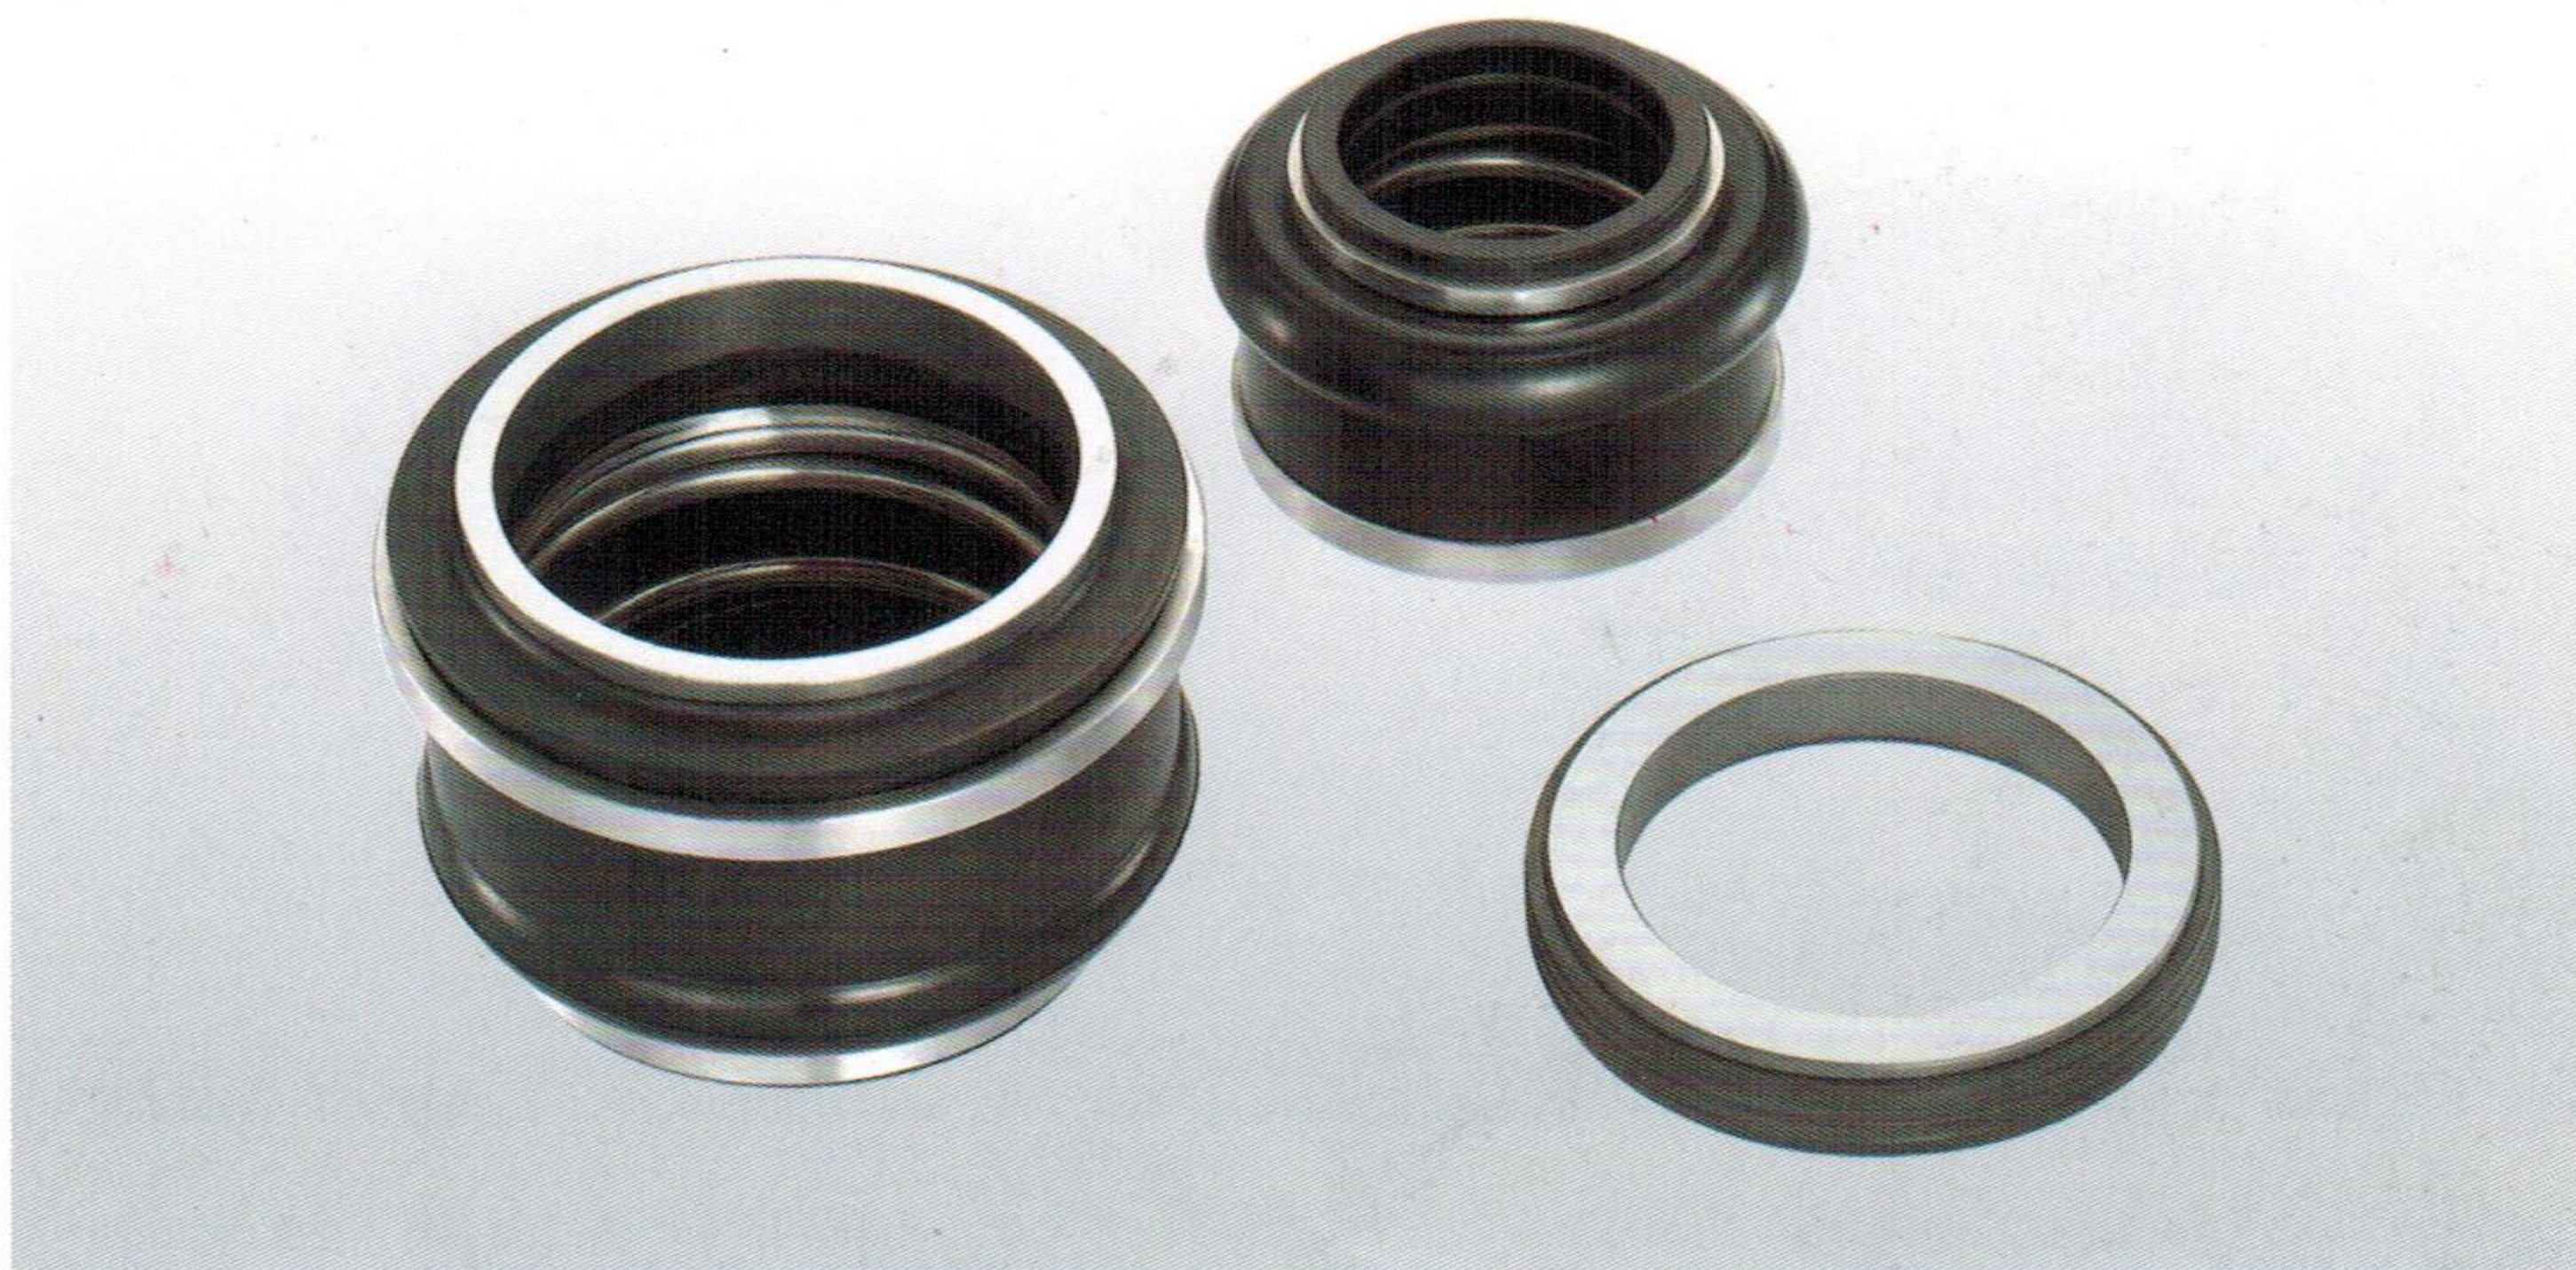

技术参数:
 压力: 2.8MPa
 线速度: 13 m/s
 温度: -30°C~200°C

OPERATING LIMITS
 Pressure: 2.8MPa
 Speed: 13m/s
 Temperature: -30°C~200°C

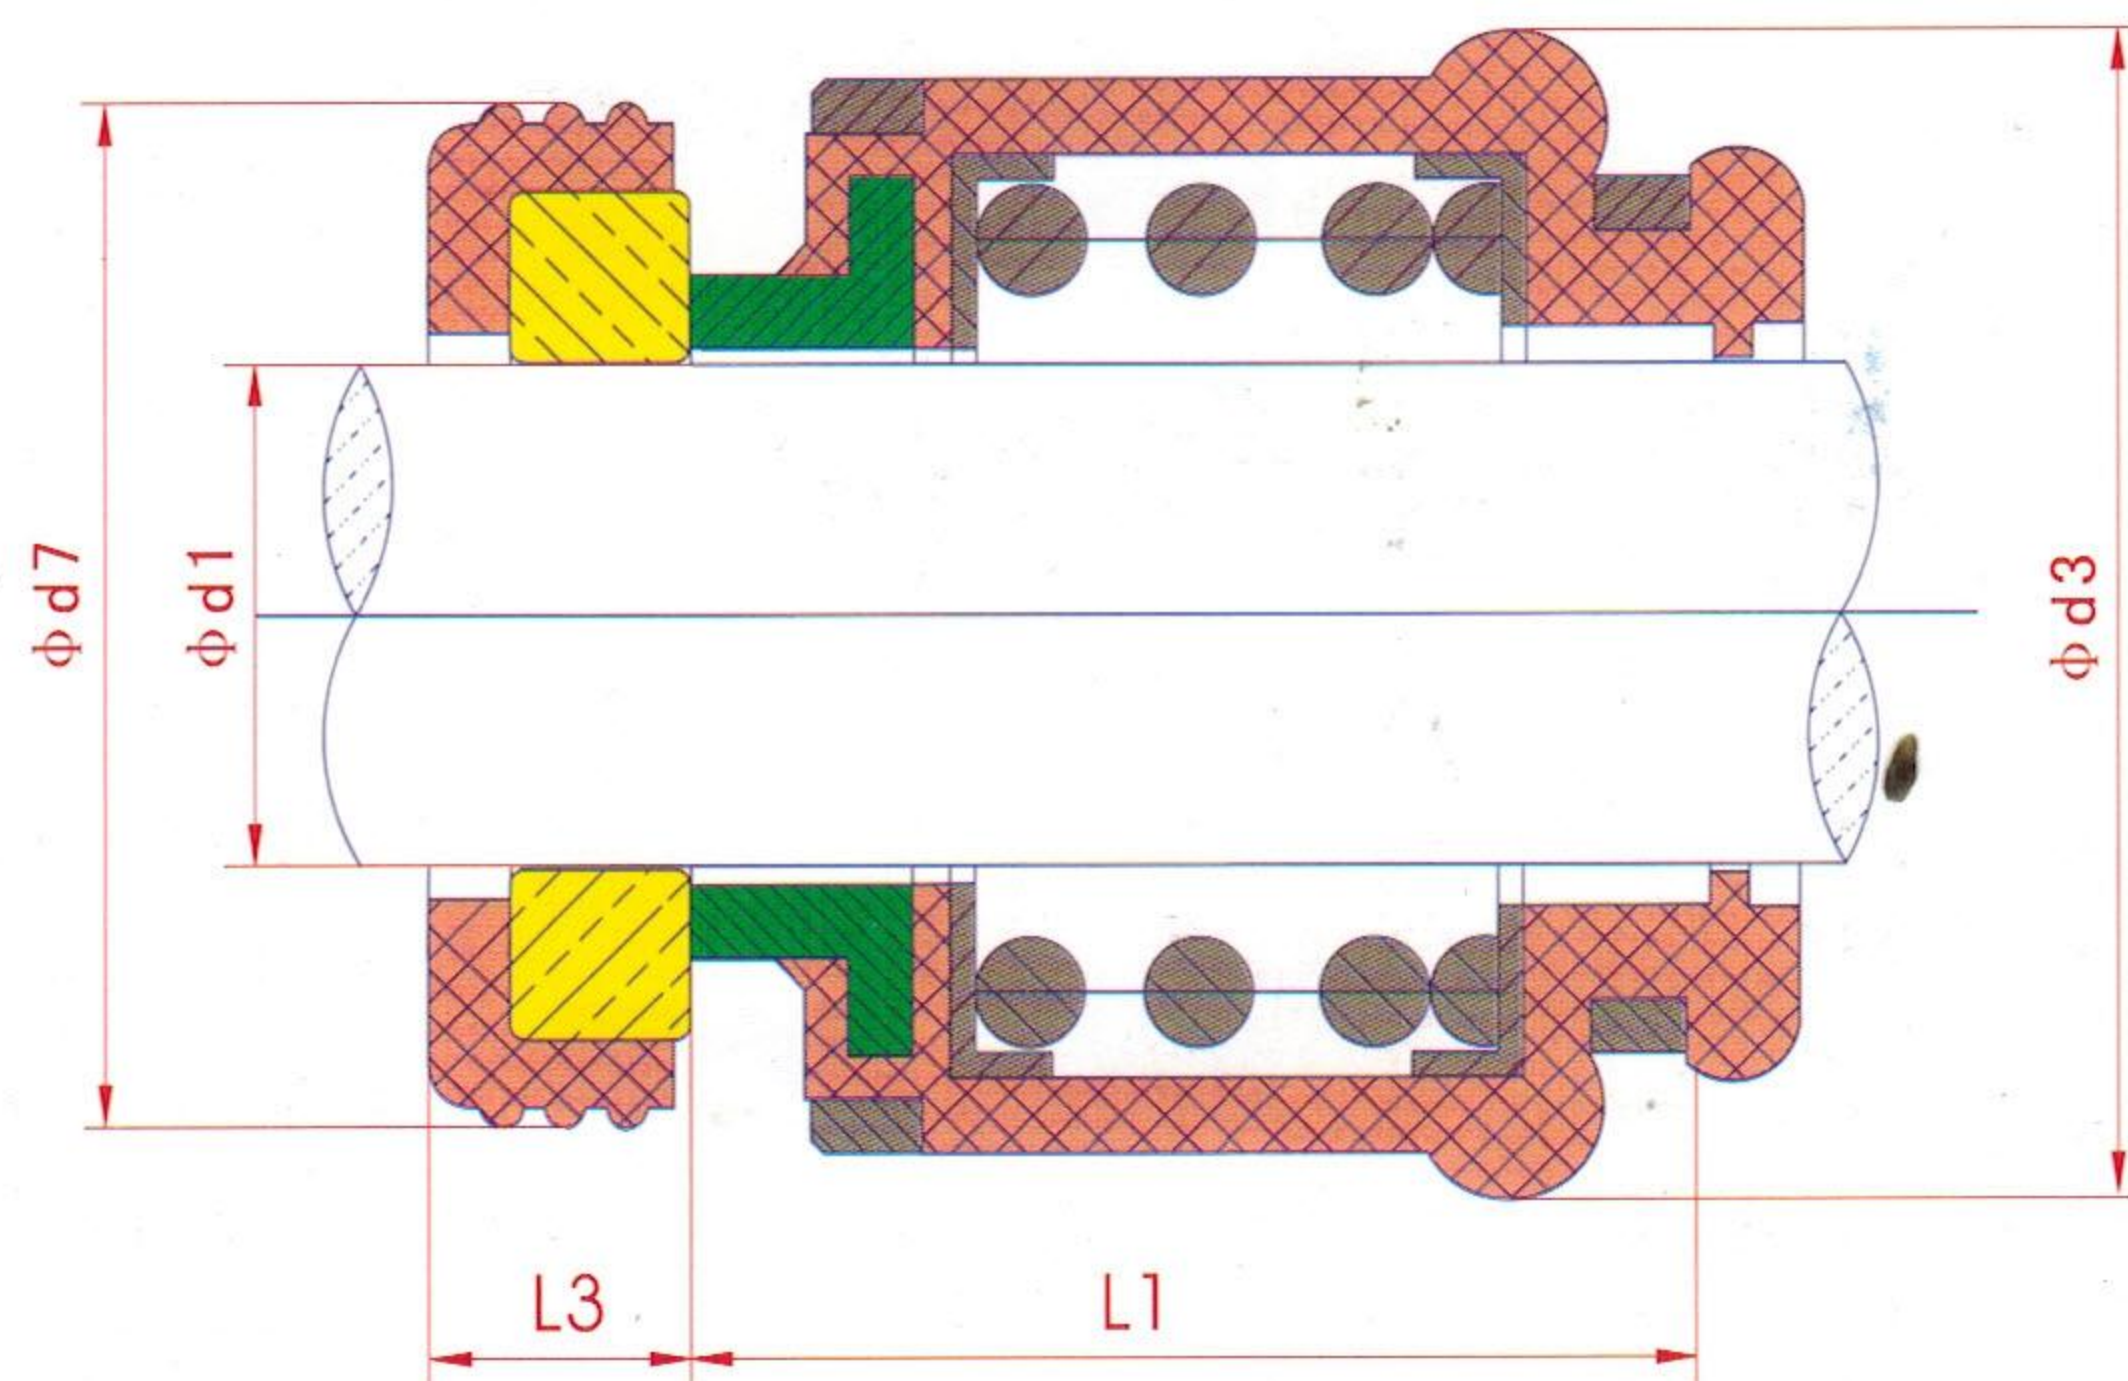

Model	d1	d3	d7	L1	L3
HM KB-28	28	50	44	30	10
HM KB-35	35	64	54	35	10.5
HM KB-50	50	74.5	70	45.2	12.2
HM KB-1 1/2"	38.1	66	53.975	35.5	10
HM KB-2"	50.8	74.5	69.85	45.2	13

● Spring 弹簧	SUS304 /SUS316 不锈钢
● Retainer 传动套	SUS304/SU316 不锈钢
● Bellows 波纹管	NBR/ EPDM /VITON 丁腈胶/三元乙丙胶/氟胶
● Stationary Ring 静环	Carbon / SIC/TC 石墨/碳化硅/碳化钨
● Cup gasket 动环套	NBR/ EPDM /VITON 丁腈胶/三元乙丙胶/氟胶
● Rotary ring 动环	Ceramic /SIC/TC 陶瓷/碳化硅/碳化钨